

LANDSCAPE LIGHTING

Fixture Type:

Catalog Number:

Project:

31/8'

Location:





SPECIFICATIONS

Input:	9 - 15VAC (Transformer is required)
Power:	4.1W / 6.6VA (Use VA value for sizing the transformer
	and calculate voltage drop.)
Brightness:	170 lm
Beam Angle:	25°
CRI:	85
Rated Life:	70,000 hours

PRODUCT DESCRIPTION

Landscape 2" recessed inground luminaire for up, down, side light applications.

FEATURES

2051

- 30° visual cutoff
- IP68 rated, Suitable for continuous immersion under water
- Factory sealed water tight fixtures
- Solid stainless steel construction
- Stainless steel spring clip allows wall or downlight applications
- Available Concrete Pour Adapter
- Spring clip, 6' lead wire and direct burial gel filled wire nuts included
- Maintains constant lumen output against voltage drop
- UL 1838 Listed

ORDERING NUMBER

		Colo	r Temp	Finish		
2051	Square	27 30	2700K 3000K	BS SS	Bronzed Stainless Steel Stainless Steel	

IEC safety StandardWalk overDrive overResistance to static load testYes (1125lbs)Yes (4496lbs)Resistance to torque and
shear loads testN/AYes

2051-30_

Example: 2051-30SS


waclighting.com Phone (800) 526.2588 Fax (800) 526.2585 Headquarters, East Manufacturing Facility 44 Harbor Park Drive Port Washington, NY 11050 South East Manufacturing Facility 1600 Distribution Ct Lithia Springs, GA 30122 **Central Manufacturing Facility** 1700 South J Elmer Freeway, Ste 100 Cedar Hill, TX 75104 West Manufacturing Facility 1750 S Archibald Ave Ontario, CA 91761

2" INGROUND - SQUARE

2051

LANDSCAPE LIGHTING

/AC

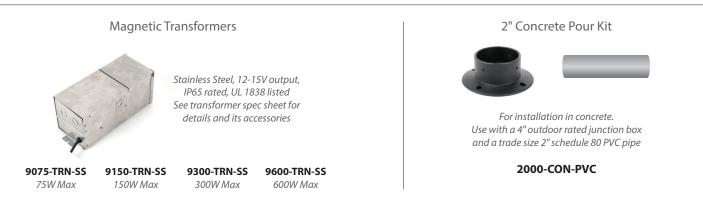

TESTED MAGNETIC LOW VOLTAGE(MLV) DIMMERS

Luminaire	Dimmer							
	Manufacturer	Family	Model	Power Rating	Range*	Note		
2051	Lutron	Diva	DVLV-600	600W	20% - 100%			
		Skylark	SLV-600P	600W	15% - 100%	Best performance		
		Skylark	S-10P	1000W		Not recommended		

*Low end of this range is determined by output current which may not directly translate to the perceived light output

WAC Lighting fixtures are compatible with a variety of dimmers. For your convenience we have included a compatibility chart showing dimmers which have been tested with our products. The recommended list below is based upon testing conducted in a lab, and the results can vary in certain field applications due to a number of factors. Exclusion from the list does not imply incompatibility, just that it has not been tested by WAC Lighting. Please reference the dimmer manufacturer's instructions for installation, or contact a WAC lighting professional at 800-526-2588.

waclighting.com West Manufacturing Facility Headquarters, East Manufacturing Facility South East Manufacturing Facility **Central Manufacturing Facility** Phone (800) 526.2588 44 Harbor Park Drive 1600 Distribution Ct 1700 South J Elmer Freeway, Ste 100 1750 S Archibald Ave (800) 526.2585 Fax Port Washington, NY 11050 Lithia Springs, GA 30122 Cedar Hill, TX 75104 Ontario, CA 91761