


2" INGROUND  
2081

WAC  
LANDSCAPE LIGHTING

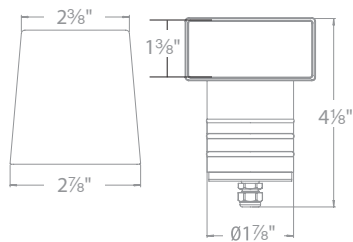

PRODUCT DESCRIPTION

Landscape 2" recessed in-ground luminaire washes walkways with a smooth illumination.

FEATURES

- Factory sealed water tight fixtures
- Cold Weather Start: -40°C to 50°C
- Solid stainless steel construction
- Available Concrete Pour Adapter
- Spring clip, 6' lead wire and direct burial gel filled wire nuts included

SPECIFICATIONS

**Input:** 9 - 15VAC (Transformer is required)  
**Power:** 4.1W / 6.6VA (Use VA value for sizing the transformer and calculate voltage drop.)  
**Brightness:** 35 lm  
**CRI:** 85  
**Rated Life:** 70,000 hours

ORDERING NUMBER

|      |       | Color Temp | Finish   |
|------|-------|------------|--|
| 2081 | Scoop | 30 3000K   | BS SS <i>Bronzed Stainless Steel<br/>Stainless Steel</i> |

2081-30\_\_\_\_\_

Example: 2081-30SS

2" INGROUND  
2081

WAC  
LANDSCAPE LIGHTING


Magnetic Transformers



Stainless Steel, 12-15V output,  
IP65 rated, UL 1838 listed  
See transformer spec sheet for  
details and its accessories

- 9075-TRN-SS  
75W Max
- 9150-TRN-SS  
150W Max
- 9300-TRN-SS  
300W Max
- 9600-TRN-SS  
600W Max

2" Concrete Pour Kit



For installation in concrete.  
Use with a 4" outdoor rated junction box  
and a trade size 2" schedule 80 PVC pipe

2000-CON-PVC

TESTED MAGNETIC LOW VOLTAGE (MLV) DIMMERS

| Luminaire | Dimmer       |         |          |              |            |                  |
|-----------|--------------|---------|----------|--------------|------------|------------------|
|           | Manufacturer | Family  | Model    | Power Rating | Range*     | Note             |
| 2081      | Lutron       | Diva    | DVLV-600 | 600W         | 20% - 100% |                  |
|           |              | Skylark | SLV-600P | 600W         | 15% - 100% | Best performance |
|           |              | Skylark | S-10P    | 1000W        |            | Not recommended  |

\*Low end of this range is determined by output current which may not directly translate to the perceived light output

WAC Lighting fixtures are compatible with a variety of dimmers. For your convenience we have included a compatibility chart showing dimmers which have been tested with our products. The recommended list below is based upon testing conducted in a lab, and the results can vary in certain field applications due to a number of factors. Exclusion from the list does not imply incompatibility, just that it has not been tested by WAC Lighting. Please reference the dimmer manufacturer's instructions for installation, or contact a WAC lighting professional at 800-526-2588.