## SCOOP 12V/120V/277V LED BOLLARD





### LANDSCAPE LIGHTING



| Fixture Type: |    |
|---------------|----|
| Catalog Numbe | r: |
| Project:      |    |
|               |    |

#### PRODUCT DESCRIPTION

Sleek linear design blends seamlessly into pathways while providing soft, even illumination

#### **FEATURES**

- IP66 rated, Protected against powerful water jets
- Factory sealed water tight fixtures
- Mounting accessories included
- UL & cUL 1838 Listed (12V); 1598 Listed (120V/277V)

| Model Color |       | r Temp Finisi |                  | hes |                    |
|-------------|-------|---------------|------------------|-----|--------------------|
| 6611        | 12V   | 27            | 2700K Warm White | BZ  | Bronze on Aluminum |
|             | 12 V  | 30            | 3000K Pure White | ВК  | Black on Aluminum  |
| 6612        | 1201/ | 27            | 2700K Warm White | BZ  | Bronze on Aluminum |
|             | 120V  | 30            | 3000K Pure White | ВК  | Black on Aluminum  |
| 6613        | 277V  | 27            | 2700K Warm White | BZ  | Bronze on Aluminum |
|             |       | 30            | 3000K Pure White | ВК  | Black on Aluminum  |

6611-\_\_\_BZ

Example: 6611-30BZ

#### **SPECIFICATIONS**

Location:

6611

Power:

9-15VAC (Transformer is required) Input:

5.7W / 6.0VA (Use VA value for sizing the transformer

and calculate voltage drop.)

**Brightness:** Up to 135 lm CRI:

Rated Life: 60,000 hours MLV dimming only Dimming:

6612

Input:

12.5W (Use VA value for sizing the transformer Power:

and calculate voltage drop.)

**Brightness:** Up to 350 lm CRI:

90

Rated Life: 60,000 hours

Dimming: TRIAC or ELV dimming

6613

CRI:

Input:

10.5W (Use VA value for sizing the transformer Power:

and calculate voltage drop.)

**Brightness:** Up to 300 lm

90

Rated Life: 60,000 hours

Dimming: ELV dimming only



waclighting.com Phone (800) 526.2588 (800) 526.2585

Headquarters, East Manufacturing Facility 44 Harbor Park Drive Port Washington, NY 11050

South East Manufacturing Facility 1600 Distribution Ct Lithia Springs, GA 30122

**Central Manufacturing Facility** 1700 South J Elmer Freeway, Ste 100 Cedar Hill, TX 75104

**West Manufacturing Facility** 1750 S Archibald Ave Ontario, CA 91761


# SCOOP 12V/120V/277V LED BOLLARD

## 6611/6612/6613

# WAC LANDSCAPE LIGHTING

• Recommended spacing for installation :


6611 (12V) Residential: 5 to 6ft Commercial: 3 to 4ft

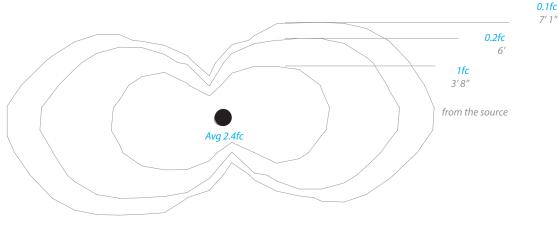

6611 (12V)

• Recommended spacing for installation :

6612, 6613 (120V, 277V) Residential: 6.5 to 7.5ft Commercial: 4.5 to 5.5ft

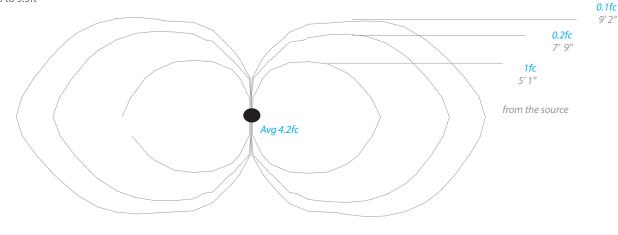

6612, 6613 (120V, 277V)

2