

LANDSCAPE PENDANT LIGHT 12V

3811 / 3821 / 3831




LANDSCAPE LIGHTING

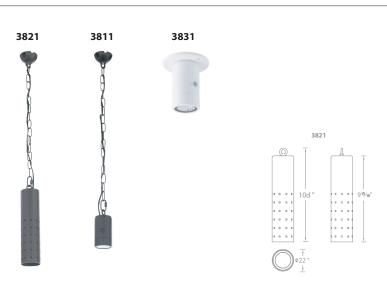



Project:

Location:



PRODUCT DESCRIPTION

Landscape 12V pendant with 3 CCT selection and adjustable beam angles, options available as hanging light or ceiling light

FEATURES

- Continuously Adjustable Beam Angles. Indexed at 35°, 45°, 55°
- IP66 rated, Protected against high-pressure water jets
- Corrosion resistant aluminum
- Factory sealed water tight fixtures
- Constant output for 9V-15V input
- Option available for hanging light or ceiling light
- 2700K/3000K/4000K selectable
- 10' lead wire and direct burial gel filled wire nuts included
- MLV dimmable with remote MLV dimmers
- On-board dimming with continuous brightness control

SPECIFICATIONS

Input: 9 - 15 VAC

Power: 1W to 7.5W / 2VA - 8VA (Use VA value for sizing the

transformer and calculate voltage drop.)

Brightness: 45 lm to 380 lm
Beam Angle: 35° to 55°
CRI: 85
Rated Life: 50,000 hours

Transformer Required (order separately)



Select Warm White, Pure White, or Cool White (2700K, 3000K or 4000K)

ORDERING NUMBER

	Color Temp		Finish		
3811-27/30/40 6' Chain included	12V	27 30 40	2700K Warm White 3000K Pure White 4000 Cool White	BK BZ	Black on Aluminum Bronze on Aluminum
3821-27/30/40 6' Chain included	12V	27 30 40	2700K Warm White 3000K Pure White 4000 Cool White	BK BZ	Black on Aluminum Bronze on Aluminum
3831-27/30/40	12V	27 30 40	2700K Warm White 3000K Pure White 4000 Cool White	BK BZ WT	Black on Aluminum Bronze on Aluminum White on Aluminum



Continuously adjustable brightness

3811-27/30/40

Example: 3811-27/30/40BZ

waclighting.com Phone (800) 526.2588 Fax (800) 526.2585

Headquarters, East Manufacturing Facility 44 Harbor Park Drive Port Washington, NY 11050 South East Manufacturing Facility 1600 Distribution Ct Lithia Springs, GA 30122

Central Manufacturing Facility 1700 South J Elmer Freeway, Ste 100 Cedar Hill, TX 75104 West Manufacturing Facility 1750 S Archibald Ave Ontario, CA 91761

AUG 2024

1

LANDSCAPE PENDANT LIGHT 12V

3811 / 3821 / 3831



Accessories

Optics



LENS-11-AMB LENS-11-GRN LENS-11-RED

Amber Green Red

LENS-11-BLU Blue LENS-11-FR

Frosted

Enhances saturation of florals and foliage

Magnetic Transformers

Stainless Steel, 12-15V output, IP65 rated, UL 1838 listed See transformer spec sheet for details and its accessories

9075-TRN-SS 75W Max

9150-TRN-SS 150W Max

9300-TRN-SS 300W Max

9600-TRN-SS 600W Max



2